


#### 1. Overview


The 6L6GC is a beam-power pentode primarily designed for use in audio frequency power amplifier applications. Features of the tube include high power output capabilities, high plate and screen dissipation ratings.

#### 2. Specifications

Heater	
$U_H$	6.3 V
$I_H$	0.9 A
Maximum Ratings	
Plate Voltage	400 V
Grid #2 Voltage	400 V
Plate Dissipation	23 W
Grid #2 Dissipation	-3 W
Heater-Cathode Voltage	$\pm 200$ V
Grid #1 Resistance	
Cathode Bias	0.5 M $\Omega$
Fixed Bias	0.1 M $\Omega$
Direct Interelectrode Capacitances	
Input	11.5 PF
Output	9.5 PF
Grid To Plate	0.9 PF
Static Parameter	
$U_a$	250 V
$U_{g_2}$	250 V
$-U_{g_1}$	14 V
$I_a$	72 mA
$I_{g_2}$	5 mA
$G_m$	6 mA/V
$r_i$	22.5 k $\Omega$
$\mu_{g_1-g_2}$	6.2
$P_{out}$	6.5 W

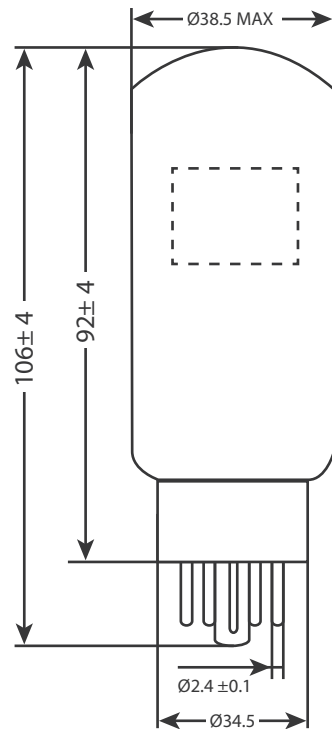

## BASING DIAGRAM



## Terminal Connections

- Pin 1 – No Connection
- Pin 2 – Heater
- Pin 3 – Plate
- Pin 4 – Grid Number 2 (Screen)
- Pin 5 – Grid Number 1
- Pin 7 – Heater
- Pin 8 – Cathode and Beam Plates

## Characteristics And Typical Operation Class A1 Amplifier

U <sub>a</sub> (0)	300 V
U <sub>g<sub>2</sub></sub>	200 V
-U <sub>g<sub>1</sub></sub> (approx)	12.5 V
R <sub>L</sub>	4.5 kΩ
Ū <sub>g<sub>1</sub></sub> (pk)	12.5 V
I <sub>a</sub> (0)	48 mA
I <sub>a</sub> (max . sig)	55 mA
I <sub>g<sub>2</sub></sub> (0)	2.5 mA
I <sub>g<sub>2</sub></sub> (max . sig)	4.7 mA
G <sub>m</sub>	5.3 mA/V
r <sub>i</sub>	35 kΩ
P <sub>out</sub>	6.5 W
D <sub>tot</sub>	11%

### Class A1 Amplifier, Triode Connection

$U_{a, g_2} (0)$	300 V
$-U_{g_1}$ (approx)	20 V
$R_L$	4 k $\Omega$
$\bar{U}_{g_1}$ (pk)	20 V
$I_{a+g_2}$	78 mA
$I_{a+g_2}$ (max . sig)	85 mA
Pout	1.8 W
Dtot	5.5%

### Push-pull Class AB1 Amplifier, Triode Connection

$U_a \cdot g_2 (0)$	400 V
$-U_{g_1}$ (approx)	45 V
$R_L$	4 k $\Omega$
$\bar{U} (g_1 - g_1 \cdot \text{pk})$	90 V
$I_{a+g_2}$	65 mA
$I_{a+g_2}$ (max . sig)	130 mA
Pout	13.3 W
Dtot	4.4%

### Push-pull Class AB2 Amplifier, Pentode Connection

$U_a (0)$	360	360 V
$U_{g_2}$	225	270 V
$-U_{g_1}$ (approx)	18	22.5 V
$R_L$	6	3.8 k $\Omega$
$\bar{U} (g_1 - g_1 \cdot \text{pk})$	36.7	50.9 V
$I_a (0)$	78	88 mA
$I_a$ (max . sig)	142	205 mA
$I_{g_2} (0)$	3.5	5 mA
$I_{g_2}$ (max . sig)	11	16 mA
Pout	31	42 W
Dtot	2	2%

